



Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

**State of West Virginia
 Solicitation Response**

Proc Folder: 1239860
Solicitation Description: Tilt Skillet - ERJ
Proc Type: Agency Purchase Order

Solicitation Closes	Solicitation Response	Version
2023-06-22 14:30	SR 0608 DCR2300000084	1

VENDOR
 000000180214
 COOKS CORRECTIONAL

Solicitation Number: ARFQ 0608 DCR2300000198
Total Bid: 62632.23000000000320142135024 **Response Date:** 2023-06-07 **Response Time:** 09:51:00
Comments:

FOR INFORMATION CONTACT THE BUYER
 Mary Jennifer Chapman
 (304) 558-2350
 jennifer.m.chapman@wv.gov

Vendor Signature X **FEIN#** **DATE**

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	Forty (40) Gallon Tilt Skillet-ERJL	3.00000	EA	20877.410000	62632.23

Comm Code	Manufacturer	Specification	Model #
48101600			

Commodity Line Comments:

Extended Description:

Forty (40) Gallon Tilt Skillet-ERJL

To:
 Eastern Regional Jail - Tilt Skillet
 Michael Butts
 94 Grapevine Rd
 Martinsburg, WV 25401

From:
 Cook's Direct
 Ethan Fischer
 27725 Diehl Rd.
 Warrenville, IL 60555
 630-821-6300 x 161

Job Reference Number: 25401-2

Item	Qty	Description	Sell	Sell Total
1	3 ea	TILTING SKILLET BRAISING PAN, GAS Cleveland Range Model No. SGL40TR DuraPan™ Tilting Skillet, gas, 40-gallon capacity, modular open base, standard with hydraulic hand tilt with quick lowering feature, stainless steel construction, includes spring-assisted cover, gallon markings and electronic spark ignition, stainless steel level adjustable feet, 130,000 BTU, CE, NSF, IPX6	\$20,034.45	\$60,103.35
	3 ea	1-year parts & labor warranty, standard		
	3 ea	Performance start-up included at customer request after equipment is installed		
	3 ea	Natural Gas		
	3 ea	120v/60/1-ph, 1.8 amps NEMA 5-15P, standard		
	3 ea	HTS Standard Manual Hand Tilt, with quick lowering feature (hydraulic)		
	3 ea	TD2SK 2" tangent draw-off valve, front mounted left side	\$655.97	\$1,967.91
	3 kt	Dormont 1675KIT48 Dormont Blue Hose™ Moveable Gas Connector Kit, 3/4" inside dia., 48" long, covered with stainless steel braid, coated with blue antimicrobial PVC, (1) SnapFast® QD, (1) full port valve, (2) 90° elbows, coiled restraining cable with hardware, 180,000 BTU/hr minimum flow capacity, limited lifetime warranty 4-6 Week Leadtime	\$186.99	\$560.97
			ITEM TOTAL:	\$62,632.23
			Merchandise	\$62,632.23
			Freight	
			Total	\$62,632.23

Prices Good Until: 06/30/2023

PRICING DOES NOT INCLUDE ANY INSTALLATION COSTS

Free Dock to Dock Shipping Does Not Include Lift Gate ServiceIf Required would be an additional \$150.00 Per Piece of Equipment**

Returned equipment may be subject to manufacturer restock fee.

Equipment picture may include features/accessories that are non-standard. Please refer to description for quoted equipment build-up detail.

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$62,632.23

DURAPAN™ SERIES

GAS, OPEN OR MODULAR BASE,
30 & 40 GALLON (115 & 150 LITER)

Project _____
 Item _____
 Quantity _____
 FCSI Section 11400 _____
 Approved _____
 Date _____

Braising Pans / Tilting Skillets

Models

- SGL-30-TR • SGM-30-TR
- SGL-40-TR • SGM-40-TR



Open base model shown

- Adjustable, Electronic Thermostat controls temperature from 100°F to 425°F
- High Efficiency Heating System with even heat distribution
- Electronic Spark Ignition (ESS)
- Fast Heat-Up and Recovery Time-Preheats in 11 minutes, full capacity from cold to boiling in 60 minutes
- Spring Assist Cover with Adjustable Vent and Full Width Handle
- On/Off Switch, Thermostat Knob and Pilots, recessed to avoid breakage
- Four Stainless Steel, Level adjustable feet, rear flanged for bolting
- All Controls are serviceable from the front of the unit
- Two pilot lights; Green = Power on, Amber = Temperature Cycling
- Meets IPX6 Water Rating Requirements
- High Limit Safety Device set at 475°F (246°C)
- Anti-Splash Pouring Lip
- Supplied with Cord & Plug for 115-volt controls
- Typical approvals include AGA, CSA, CE and NSF

Short Form Specifications

Shall be CLEVELAND, Tilting Skillet;
 Model SG _____ - _____ - TR gas
 (TYPE _____) - holding no less than _____
 gallons (_____ liters); complete with
 Thermostatic Safety and Gas Controls; Gallon
 Markings; Stainless Steel Clad 5/8" Cooking
 Surface; Hand Tilt; Spring Assist Cover with
 adjustable Vent. All Stainless Steel
 Construction.

Standard Features

- Leg or Modular Base
- Full 30/40 Gallon (115/150 Liters) Capacity Rating to Bottom of Pouring Lip
- Hydraulic Hand Tilt with quick lowering feature (HTS)
- Stainless Steel Clad 5/8" Cooking Surface Guaranteed against warping
- Stainless Steel Coved Cornered Pans with both Gallon and Liter Markings
- All Stainless Steel Construction for durability and easy cleaning

Options & Accessories

- Sliding Drain Drawer with Splash Screen (SLD) (for SGL models only)
- Power Tilt with Hand Tilt Override (PT1)
- Double or Single Pantry Faucet (SPS14, DPS14), includes Faucet Mounting Bracket
- Double or Single Pantry Skillet Filler with 60" hose (SKF-S or DKF-S)
- Hot & Cold Water Pre-Rinse Spray Head with Hose (PRS-S)
- Gas types other than natural
- Voltage Option:
 - VOSK4, 220/240 Volt, 50 Hz, 1 Phase - for export
- Food Strainers for pouring spout (FS)
- Vegetable Steamers (VS)
- Poaching Pans (PP)
- Wall Mounting (WMS)
- In-Wall Carrier (IWCS)
- Pan Carriers (PCS), not available on 30 gallon models with a Tangent Draw-Off Valve
- 2" Tangent Draw-Off Valve (TD2), left side only

KE004046-93 rev B

Braising Pans / Tilting Skillets

18301 St. Clair Street
Cleveland, OH 44110

Tel 1.216.481.4900
Fax 1.216.481.3782
Email steam@clevelandrange.com



www.clevelandrange.com
Section 9, Page 8
xxxxxxx10 / 2018



NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted. Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes. Cleveland Range equipment is built to comply with applicable standards for manufacturers, included among those approval agencies are U.L., NSF, CGA, CSA, ETL and others.

(NOT TO SCALE)

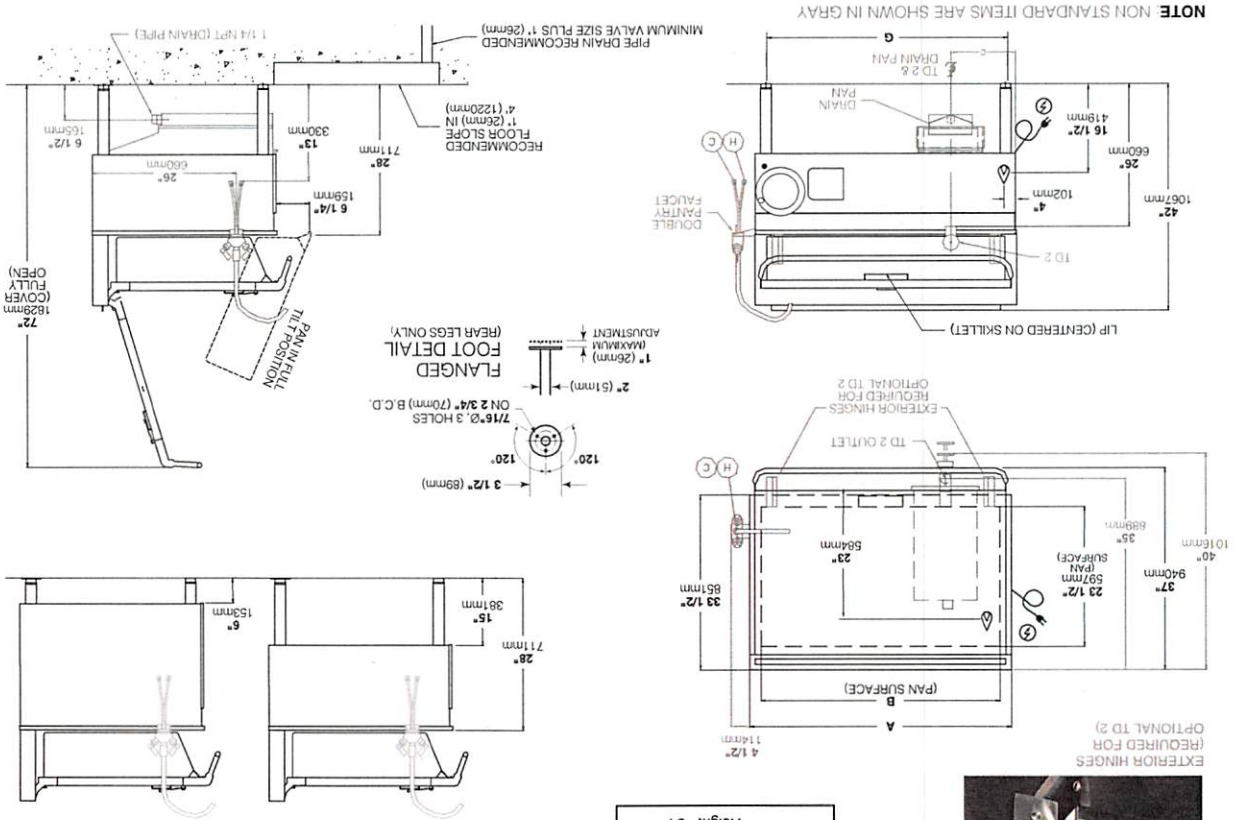

Shipping Weights & Dimensions

Model - SGL30TR	Weight - 504 lbs	Width - 44"	Depth - 44"	Height - 54"
Model - SGL40TR	Weight - 624 lbs	Width - 48"	Depth - 58"	Height - 54"

SPECIFICATIONS

ELECTRICAL SUPPLY (6' CORD & PLUG)	GAS SUPPLY (PIPING 3/4" NPT)		CLEARANCE
	TYPE NAT or LP	MIN. TO COMBUSTIBLE	
VOLTS: 120	PHASE: 1	WATER COLUMN 4.5 (NAT), 10.5 (LP)	MIN. TO COMBUSTIBLE
FREQ: 60 HZ	AMPS: 1.8	BTU PER CU. FT.: 1000 (NAT), 2500 (LP)	SURFACES:
50 HZ	50 HZ	SUPPLY PRESSURE:	SURFACES, SIDES & REAR: 0
		BTU RATINGS	MIN. TO NON COMBUSTIBLE
		SGL-30-TR: 91,000 per hour	SIDES: 0, REAR: 6" (153mm)
		SGL-40-TR: 130,000 per hour	NOTE: 4 1/2" (115mm) required on right hand side for faucet

DIMENSIONS

MODEL	A	B	C	D	E	G
SGL-30-TR	36"	32"	9"	5"	20"	32 7/8"
	(915mm)	(812mm)	(229mm)	(127mm)	(508mm)	(835mm)
SGL-40-TR	48"	44"	12 1/8"	8"	22"	44 7/8"
	(1220mm)	(1118mm)	(308mm)	(203mm)	(559mm)	(1140mm)

CAPACITIES

In 4 oz. servings. Other sizes may be calculated.
 30 gallons / 115 Liters 960
 40 gallons / 150 Liters 1280

Engineering Specification

Job Name _____ Contractor _____
 Job Location _____ Approval _____
 Engineer _____ Contractor's P.O. No. _____
 Approval _____ Representative _____
 SKU _____

SnapFast® Quick-Disconnect Assemblies

Sizes: 1/2" to 1 1/4"

SnapFast Quick-Disconnect Assemblies feature flexible movement and the one-handed quick-disconnect fitting with a unique thermal shut-off design that automatically shuts off the gas when the internal temperature exceeds 350°F (177°C).

Features

SnapFast® One-Handed Quick-Disconnect

- Quick-Disconnect Brass body, aluminum collar
- Thermal Shut-off Shuts off gas when internal temperatures exceed 350°F (177°C)

Additional Components

- Restraining Device PVC coated, steel multi-strand cable and mounting hardware
- Valve Full port, brass body
- Elbow Malleable iron
- *Deluxe Kits Include The Dormont Blue Hose, valve, restraining device, elbows, SnapFast, display box

Specifications

The Dormont Blue Hose®

- Tubing Annealed, 304 stainless steel
- Braiding Multi-strand, stainless steel wire
- Coating Blue antimicrobial PVC, melts at 350°F (177°C); coating will not hold a flame
- End Fittings Carbon steel; zinc trivalent chromate
- Stress Guard® 360° rotational end fitting at both ends

Safety System™ The Dormont Safety System™ is the first and only complete gas equipment connection system specifically engineered for the commercial kitchen. The Safety System consists of the famous Dormont Blue Hose and a variety of accessories designed for improved safety and performance in commercial kitchens. Because they are manufactured in the USA under an ISO qualified production process and to multiple design certifications, you can Connect with Confidence with the Dormont Safety System.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Dormont product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Dormont Technical Service. Dormont reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Dormont products previously or subsequently sold. Refer to the owner's manual for warranty information.



Approvals & Certifications



NSF/ANSI 169 – Special-purpose food equipment and devices
 ANSI Z21.69 / CSA 6.16 – Connectors for moveable gas appliances
 ANSI Z21.41 / CSA 6.9 – Quick-disconnect devices for use with gas fuel appliances
 ANSI Z21.15 / CSA 9.1 – Manually operated gas valves for appliances, appliance connectors

Meets requirements of ANSI Z223.1 / NFPA 54 National Fuel Gas Code

Not for use in temperatures less than 32°F (0°C). For indoor use only.

Max operating pressure 1/2 psi.

Refer to the catalog for additional approvals and certifications or go to www.dormont.com.

A restraining device is required for all moveable gas equipment.

SnapFast® Quick-Disconnect Deluxe Kit Assembly

Ordering Information

CONFIGURATION	SIZE I.D.	24" (607MM)	36" (914MM)	48" (1,219MM)	60" (1,524MM)	72" (1,829MM)
Deluxe Kit*	½"	1650KIT24	1650KIT36	1650KIT48	1650KIT60	1650KIT72
Basic Kit**		1650BPQR24	1650BPQR36	1650BPQR48	1650BPQR60	1650BPQR72
Hose Assembly***		1650BPQ24	1650BPQ36	1650BPQ48	1650BPQ60	1650BPQ72
Deluxe Kit*	¾"	1675KIT24	1675KIT36	1675KIT48	1675KIT60	1675KIT72
Basic Kit**		1675BPQR24	1675BPQR36	1675BPQR48	1675BPQR60	1675BPQR72
Hose Assembly***		1675BPQ24	1675BPQ36	1675BPQ48	1675BPQ60	1675BPQ72
Deluxe Kit*	1"	16100KIT24	16100KIT36	16100KIT48	16100KIT60	16100KIT72
Basic Kit**		16100BPQR24	16100BPQR36	16100BPQR48	16100BPQR60	16100BPQR72
Hose Assembly***		16100BPQ24	16100BPQ36	16100BPQ48	16100BPQ60	16100BPQ72
Deluxe Kit*	1¼"	16125KIT24	16125KIT36	16125KIT48	16125KIT60	16125KIT72
Basic Kit**		16125BPQR24	16125BPQR36	16125BPQR48	16125BPQR60	16125BPQR72
Hose Assembly***		16125BPQ24	16125BPQ36	16125BPQ48	16125BPQ60	16125BPQ72

BTU/hr Flow Capacity Natural Gas

(Flow rating BTU/hr 0.64 SP. GR. @ 0.5 inch WC pressure drop)

MODEL	SIZE I.D.	LENGTH				
		24" (607MM)	36" (914MM)	48" (1,219MM)	60" (1,524MM)	72" (1,829MM)
1650BPQ	½"	87,000	77,000	68,000	60,000	55,000
1675BPQ	¾"	232,000	218,000	180,000	158,000	139,000
16100BPQ	1"	414,000	379,000	334,000	294,000	279,000
16125BPQ	1¼"	699,000	615,000	541,000	476,000	419,000

* **Deluxe Kits include:** The Dormont Blue Hose and restraining device, full port valve and (2) street elbows

****Basic Kits include:** The Dormont Blue Hose and restraining device, street elbow and SnapFast

*****Hose Assemblies include:** The Dormont Blue Hose, SnapFast and street elbow

Typical Installation



Options

The Dormont Blue Hose®

The Dormont Blue Hose is a commercial, moveable-grade gas connector designed for use with moveable equipment.

Moveable equipment is defined in ANSI Standard Z21.69/CSA 6.16 as gas utilization equipment that may be mounted on casters or otherwise be subject to movement.



- One-handed quick-disconnect fitting
- Thermal shut-off when internal temperature exceeds 350°F (177°C)



Restraining Device

- ANSI Z21.69 Standard section 1.7.4 states: Connectors when used on caster-mounted equipment shall be installed with a restraining device, which prevents transmission of the strain to the connector



We guarantee our commercial gas connectors for the life of the original appliance to which it is connected.

Dormont
A WATTS Brand

Safety-Set®

Benefits

- Can be used with all caster-mounted equipment including cooking appliances, warming carts, salad bars, and refrigerators
- Crush Resistant
- Resistant to oils and greases
- Open-floor design allows appliance to rest level on the floor to ensure even cooking



Features

- Compatible with 4", 5", and 6" casters
- Certified to NSF/ANSI Standard 169 – Special Purpose Food Equipment & Devices
- Flexible, tough injection molded Thermoplastic Polyurethane (TPU)
- Able to withstand 1,000 PSI of crush pressure

Ordering Instructions:

The Safety-Set wheel positioning product can be ordered individually or with the Blue Hose Kit.

The Safety-Set model name is "PS" and the ordering number is 0241002.

When ordering the Safety-Set with the Blue Hose kit, simply add the letters "PS" to the end of the model number.