

State of West Virginia Solicitation Response

Proc Folder: 1239860

Solicitation Description: Tilt Skillet - ERJ

Proc Type: Agency Purchase Order

 Solicitation Closes
 Solicitation Response
 Version

 2023-06-22 14:30
 SR 0608 DCR2300000083
 1

VENDOR

000000203433

DOUGLAS EQUIPMENT

Solicitation Number: ARFQ 0608 DCR2300000198

Total Bid: 16992.25999999999839928932487 **Response Date:** 2023-06-22 **Response Time:** 14:27:00

Comments:

FOR INFORMATION CONTACT THE BUYER

Mary Jennifer Chapman (304) 558-2350 jennifer.m.chapman@wv.gov

Vendor Signature X

FEIN# DATE

All offers subject to all terms and conditions contained in this solicitation

 Date Printed:
 Aug 15, 2023
 Page: 1
 FORM ID: WV-PRC-SR-001 2020/05

Line	ne Comm Ln Desc		Unit Issue	Ln Total Or Contract Amount	
1	Forty (40) Gallon Tilt Skillet-ERJL	1.00000	EA	16992.260000	16992.26

Comm Code	Manufacturer	Specification	Model #	
48101600				

Commodity Line Comments:

Extended Description:

Forty (40) Gallon Tilt Skillet-ERJL

Date Printed: Aug 15, 2023 Page: 2 FORM ID: WV-PRC-SR-001 2020/05





06/22/2023

Project:

protective control box cover (lock by others)

50035 - Eastern Regional Jail and Correctional Facility

From:

Douglas Equipment Shane Poore 301 North St.

Bluefield, WV 24701-4048

304-327-0149

001f400000CvFi6AAF 3043270149 (Contact)

ITEM TOTAL:

Total

Item Qty Description Sell Sell Total 1 ea TILTING SKILLET BRAISING PAN, ELECTRIC \$16,992.26 1 \$16,992.26 Cleveland Range Model No. SEL40T1 PowerPan™ Tilting Skillet, electric, 40-gallon capacity, bead blasted cooking surface, 10° tilt cooking feature, with easy manual hand tilt, spring-assisted cover with vent, gallon & liter markings, stainless steel construction with open leg frame, 208v/60/3-ph, UL, CE, NSF 1 ea 1-year parts & labor warranty, standard 1 ea Performance start-up included at customer request after equipment is installed (Free Water Quality Check included) (contact Cleveland Sales Representative for details) 1 ea Standard wattage 1 ea 208v/60/3-ph, 18kW, 50.0 amps, standard 1 ea Standard controls, temperature control dial, LED ON indicator light, main power switch, standard 1 ea CP-SKTD Complete Correctional Package for skillets with TD valve option, includes: CP-TDM tangent draw off resistance modification, CP-SCB tamper proof exterior, CPSCRD screw drivers, CP-PCB

Acceptance:	Date:	
Printed Name:		

Project Grand Total: \$16,992.26

\$16,992.26 \$16,992.26

POWERPAN™ SERIES

ELECTRIC, 35" RIM HEIGHT,, 30 & 40 GALLON (110 & 150 LITER)

Project
Item
Quantity
FCSI Section 11400
PCSI Section 11400
Approved
Data
Date

Models

• SEL-30-T1 • SEL-40-T1





easyDial and Core Temperature Probe options

Short Form Specifications

Shall be CLEVELAND, Tilting Skillet Model Number SEL-___-T1, electric

(_____ KW, ____ Volts) holding no less than ____ gallons (____ liters); Complete with Thermostatic and Safety Controls, Gallon/Liter Markings, 5/8" Stainless Steel Clad Cooking Surface with Bead Blasted Finish, Easy to use Manual Hand Tilt with Enclosed Permanently Lubricated Gearbox, Spring Assist Cover with adjustable Vent, Adjustable Feet with Rear Flanged and Front Bullet Style, Gallon/Liter Markings and Splash Proof Controls.

Standard Features

- Open base design for easy cleaning and maintenance.
- 5/8" Stainless Steel Bead Blasted cooking surface prevents warping and keeps food from sticking.
- Durable 12 gauge, 304 Stainless Steel pan construction. 5/8" (16mm) mild steel clad bottom plus a 1/16" (1.6mm). Stainless Steel plate for even temperature distribution.
- · Low 35" rim height for easy operation and cleaning.
- Splash Proof Controls and construction.
- Easy-to-turn manual hand tilt with enclosed permantly lubricated gearbox. Optional power tilt with manual override available.
- Gallon/Liter Markings and Vented Spring Assist Cover standard.
- · Available with Optional 2" Tangent Draw-Off Valve.
- 10° Cooking Feature. Tilt unit up to 10° without the power being turned off.
- Adjustable, Electronic Thermostat accurately controls temperature from 100° to 450° F.
- Standard Voltages 208-240, single and three phase.
- · Spring-Assist Cover with full width handle and vent.
- Typical approvals include UL, CSA, CE and NSF.
- Adjustable Solid State Thermostat accurately controls temperature from 140°F to 425°F.

Standard Control Panel includes:

Temperature Control Dial, LED ON Indicator Light, Main Power Switch.

easyDial Control Panel (optional) includes:

Selector Dial with LED Ring, Large Display Screen, Three Cooking Modes, Built-In Self-Diagnostics and Display, Temperature Select Button, Timer Set Button (Hrs/Min), Settings Button, Main Power Button, Probe Connection Port, LED Indicator Lights for Heat-ON, Product Probe, Temperature, Time, Settings, Self-Diagnostics.

Options & Accessories

- easyDial Control
- Core Temperature Probe Option
- Power Tilt with Manual Override (PT2)
- 2" (50 mm) Tangent Draw-Off Valve (TD2SK), left side only
- Double or Single Pantry Faucet (SPS14, DPS14), includes Faucet Mounting Bracket
- Faucet Bracket (FBKT1)
- Pan Carriers (PCS), not available on 30 gallon models with a Tangent Draw-Off Valve
 Vegetable Steamer Baskets (VS)
- Hot & Cold Water Pre-Rinse Spray Head with Hose (PRS-S)
- · Poaching Pans (PP)
- Protective Control Cover (CP-PCB-T1)
- Casters, 2 swivel, 2 locking (CST1)
- High Wattage Option (HW) (required for CE) 16KW on 30 gallons, 24KW on 40 gallons
- Voltage Options:
 - VOSK1, 240 Volt, 60 Hz, 3 Phase
- VOSK2, 380/415 Volt, 50 Hz, 3 Phase for export
- VOSK3, 440/480 Volt, 60 Hz, 3 Phase

KE004046-88

18301 St. Clair Street Cleveland, OH 44110 Tel 1.216.481.4900 Fax 1.216.481.3782 Email steam@clevelandrange.com www.clevelandrange.com Section 9, Page 9 5669A 6 / 2019



raising Pans / Tilting Skillets



DIMENSIONS

MODEL	Α	В	С	D	F	G	Н	CLEARANCE	
SEL-30-T1	37 7/8"	24 1/2"	31 3/4"	12"	18 1/4"	5 3/4"	8"	RIGHT: 4" (102mm) (manual tilt)	
3EL-30-11	(963mm)	(623mm)	(807mm)	(305mm)	(464mm)	(146mm)	(204mm)	1" (26mm) (power tilt)	
SEL-40-T1	49 7/8"	36 1/2"	43 3/4"	18"	24 1/4"	5 3/4"	8"		
3EL-40-11	(1267mm)	(928mm)	(1112mm)	(458mm)	(616mm)	(146mm)	(204mm)	LEFT: 0", REAR: 0"	

CAPACITIES

In 4 oz. servings. Other sizes may be calculated. 30 gallons / 115 Liters......960 40 gallons / 150 Liters......1280

ELECTRICAL

41" 1042mm

42 3/4"

28 3/4"

Volts	Ph	Hz	Total	Amps	Wire	Volts	Ph	Hz	Total	Amps	Wire
			Watts		Size				Watts		Size
SEL-3	0-T1	(Standa	ard Wattag	e)		SEL-4	10-T1	(Standa	ard Wattag	e)	
208	1	60	12000	57.7	4	208	1	60	18000	86.5	2
208	3	60	12000	33.3	8	208	3	60	18000	50.0	6
240	1	60	12000	50.0	6	240	1	60	18000	75.0	3
240	3	60	12000	28.9	8	240	3	60	18000	43.3	6
380	1	50	10013	26.3	8	380	1	50	15019	39.5	6
380	3	50	10013	15.2	12	380	3	50	15019	22.8	10
416	1	50	12000	28.8	8	416	1	50	18000	43.3	6
416	3	50	12000	16.7	10	416	3	50	18000	25.0	8
480	1	60	12000	25.0	8	480	1	60	18000	37.5	6
480	3	60	12000	14.4	12	480	3	60	18000	21.7	10
SEL-30-T1 (High Wattage)					SEL-40-T1 (High Wattage)						
208	1	60	16020	77.0	3	208	3	60	24000	66.6	4
208	3	60	16020	44.5	6	240	3	60	24000	57.7	4
240	1	60	16020	66.8	4	380	3	50	20026	30.4	8
240	3	60	16020	38.5	6	416	3	50	24000	33.3	8
380	1	50	13367	35.2	8	480	3	60	24000	28.9	8
380	3	50	13367	20.3	10						
416	1	50	16020	38.5	6						
416	3	50	16020	22.2	10						
480	1	60	16020	33.4	8						
480	3	60	16020	19.3	10						

(PAN SURFACE)







Standard Control Panel

easyDial Control Panel with Core Temperature Probe

LEG LOCATION & SUGGESTED FLOOR DRAIN DETAIL

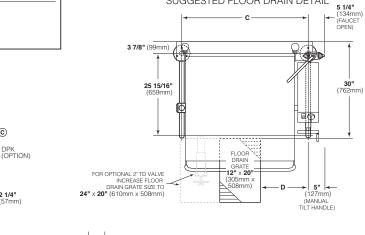

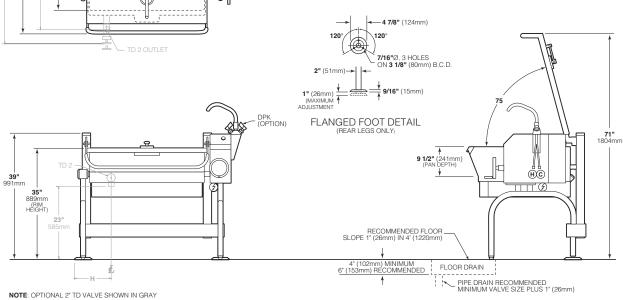

(H)(C)

18301 St. Clair Street Cleveland, OH 44110 Tel 1.216.481.4900 Fax 1.216.481.3782 Email steam@clevelandrange.com

Cleveland Range reserves right of design improvement or modification, as warranted.

Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.

Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L., NSF, CGA, CSA, ETL and others.

www.clevelandrange.com Section 9, Page 10 6 / 2019



(NOT TO SCALE)

Braising Pans / Tilting Skillets